

SS Series In-Line Models

Application

- Multipurpose

Stainless Steel Filtration Systems

Spec No. _____

Quantity _____



Product Features

- ◆ In-line units have 316 stainless steel heads with 304 stainless steel housings, rated to 300 psi @ 100°F (2,069 kPa @ 38°C) for durability.
- Hot and cold water applications**
- Rigid construction of the stainless steel housing provides durability and withstands extreme water hammer.

CUNO's line of stainless steel filter housings accommodate our line of premium performance sediment and chlorine taste and odor reduction cartridges. The compact footprint allows these units to be installed as in-line protection for point-of-entry, or equipment protection at point-of-use. Stainless steel housings assure reliable performance in high temperature or pressure applications.

Product Specifications - In-Line Models

Model Number	Part Number	Description	Connections	Max. Flow Rate	Supplied Cartridges
CFS1610SS	55920-04	316 Stainless Head 304 Stainless Housing	3/4" Horizontal NPT	8 gpm* (30.3 lpm)	(1) CFS110
CFS2610SS	55290-05	316 Stainless Head 304 Stainless Housing	3/4" Horizontal NPT	16 gpm* (60.6 lpm)	(2) CFS110
CFSTSD	55733-01	316 Stainless Head 304 Stainless Housing	3/8" Vertical NPT	2 gpm (7.6 lpm)	(1) CFS217H
CFSTSD-H	55733-03	316 Stainless Head 304 Stainless Housing	3/8" Vertical NPT	2 gpm (7.6 lpm)	(1) CFSCB10

* Based on use of CFS110 sediment cartridges

** CFSTSD-H system with CFSCB10 cartridge tested for hot water applications up to 200°F (93°C). NOTE: Temperature rating is for filtration only.



Water Filter Systems
Foodservice

Stainless Steel Filtration Systems

Spec No. _____
 Quantity _____
 Model Number _____
 Part Number _____


Physical Specifications:

In-Line Units:

- Head to be 316 stainless steel.
- Housing to be 304 stainless steel.
- Connections to be either 3/4" NPT horizontal or 3/8" NPT vertical.
- Maximum pressure to be 125 psi (862 kPa) on floor units and 300 psi (2,069 kPa) on in-line units, maximum temperature to be 100°F (38°C).
- CFSTSD-H maximum temperature to be 200°F @ 300 psi (93°C @ 2,068 kPa).
- All materials to be FDA compliant with CFR title 21.

Installation Tips:

- Shut off downstream equipment prior to installation of the system.
- Do not exceed operating parameters for temperature or pressure.
- For commercial use only.

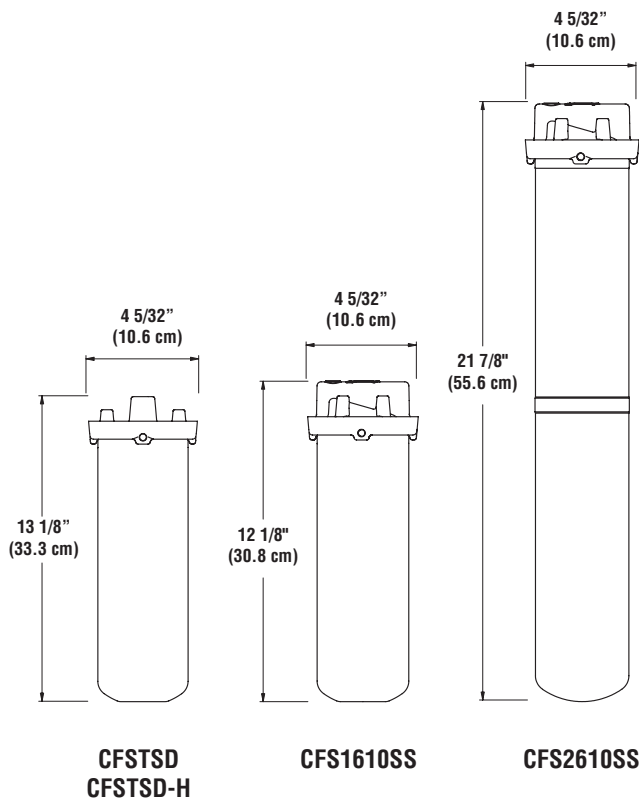

Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold.

Limited 10 Year Warranty

CUNO Incorporated warrants to the original purchaser-consumer that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of ten (10) years from the date of original purchase by the consumer. This warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO. This warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

Service Worldwide

China
 CUNO Filtration Shanghai Co. Ltd.
 No. 2 Plant East Side
 Xin Miao San Road
 XinQiao Town SongJiang District
 Shanghai, China 201612

Australia
 CUNO Pacific Pty Ltd.
 140 Sunnyholt Road
 Blacktown, N.S.W. 2148
 Australia

Europe
 CUNO Limited
 21 Woking Business Park
 Albert Drive
 Woking, Surrey
 GU21 5JY, England



Japan
 CUNO K.K.
 Hodogaya Station Building 6F
 1-7, Iwai-Cho, Hodogaya-Ku
 Yokohama 240-0023, Japan

Brazil
 CUNO Latina Ltda
 Rua AMF do Brazil - 251
 18120 Mairinque-SP, Brazil

Singapore
 CUNO Filtration Asia Pte Ltd
 18 Tuas Link 1
 3rd Floor
 Singapore 638599

CUNO Incorporated
 400 Research Parkway
 Meriden, CT 06450, USA
 Toll Free: 1-888-218-CUNO
 Worldwide: 203-237-5541
 Fax: 203-238-8701